

Tremo



Quickinfo

GENERAL


Indoor Lighting-Recessed Downlight
 Recessed
 IP20
 Tridonic
 220-240 V 50/60Hz
 EPISTAR SMD
 Die-casting aluminum

COLOUR


○ White ● Black

DIMENSIONS

size in mm


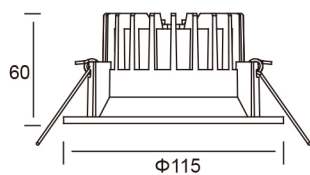


Cutout: $\Phi 100$

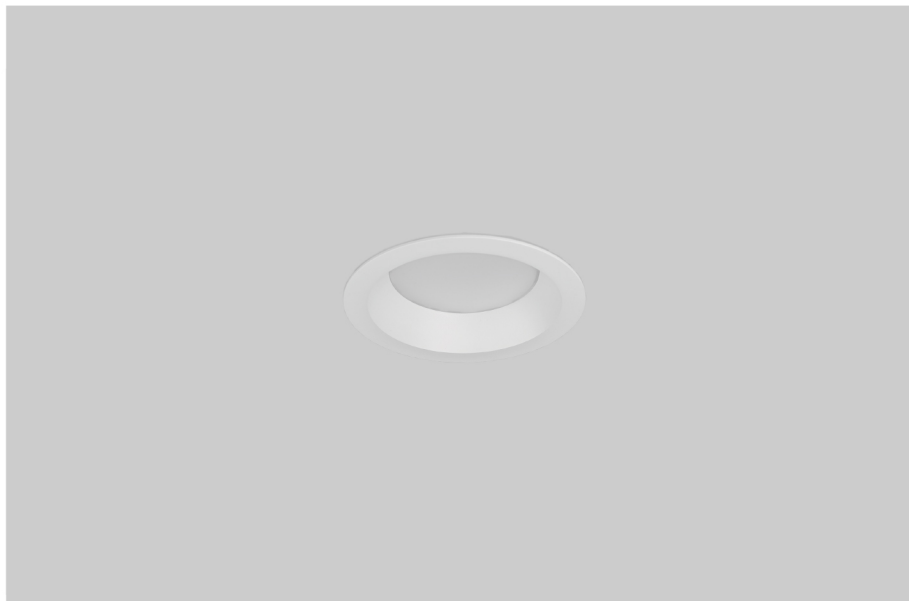

Purchase Code	Luminaire Power [W]	Luminaire Lumen [lm]	Color Temperature [K]	Beam Angle [°]	CRI [Ra]
2301.010.090.3000.80	10	610	3000	90	>80
2301.010.090.4000.80	10	660	4000	90	>80

ERP LABEL

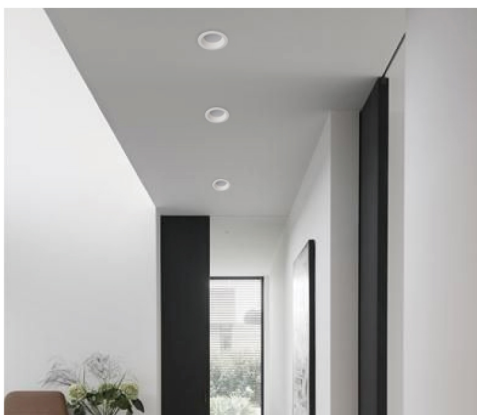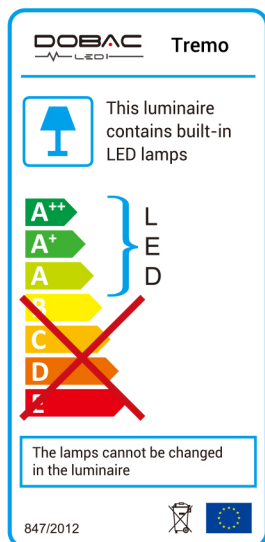

Sample image

Tremo




2301.010.090.3000.80

Packing Info


24pcs / ctn
 G.W. 9.90kg
 ctn size 470x420x340 mm

90° 3000K CRI >80

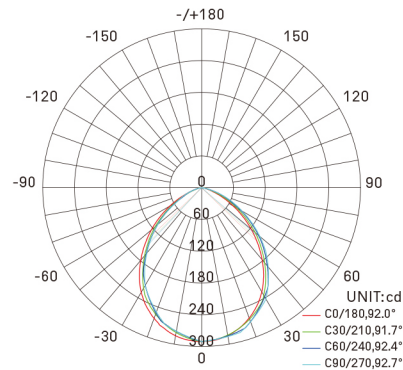

AVERAGE BEAM ANGLE(50%):92.2 DEG

Flux out:421.1 lm

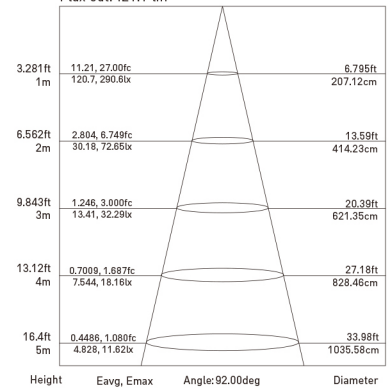


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2301.010.090.4000.80

Packing Info


24pcs / ctn
 G.W. 9.90kg
 ctn size 470x420x340 mm

90° 4000K CRI >80

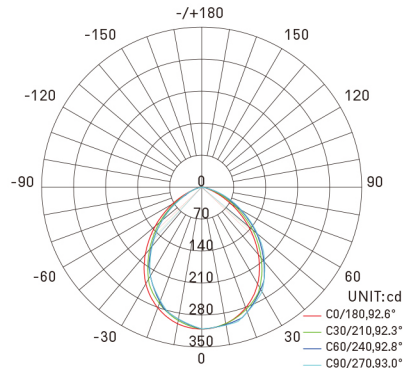

AVERAGE BEAM ANGLE(50%):92.7 DEG

Flux out:451.8 lm

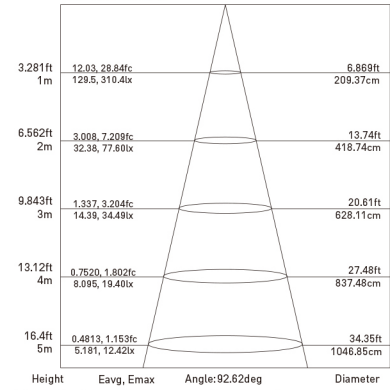

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.